

Smartgen[®]

GSM-2/3 MODEM

OPERATING INSTRUCTION



Smartgen Electronics

1. GSM-2/3 INTRODUCTION


GSM-2/3 for GSM modem, through the control module can send SMS messages. Relevant technical parameters are as follows:

- Power supply: +5~35VDC.
- Antenna port: 50Ω/SMA.
- SIM card: 1.8/3V, automatic detection.
- Maximum power waste: 2W (900MHz), 1W (1800MHz).
- RS-232 interface: DB15 (Equipped with turning wiring).
- Dimensions (mm): 88x60x26.
- Weight: 100g.
- Operating temperature range: -20~+55°C.
- Storage temperature: -25~+70°C.
- Relatively humidity: 95% (No condensation).

2. CASE STRUCTURE



3. TYPICAL WIRING DIAGRAM

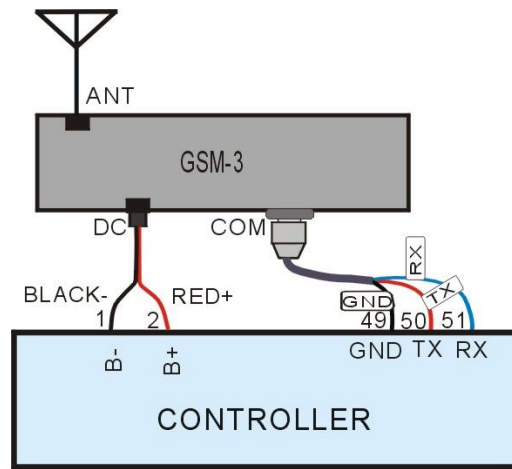

Note: GSM-2 only used in china, GSM-3 for general international edition.